



**TAPADIA  
POLYESTERS**


# TAPADIA POLYESTERS PVT LTD

D4, Butibori MIDC, Butibori - 441122 Maharashtra, India  
Mobile: +91 9823652225  
salestapadia@gmail.com | [www.tapadiapolyesters.com](http://www.tapadiapolyesters.com)

## PRODUCT DATA SHEET

**T-PET PA-02**

### Film Structure

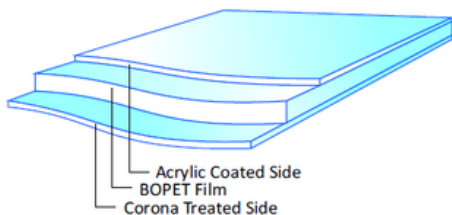

### Product Description:

PA-02 grade is a Biaxially Oriented Transparent Polyester Film with one side acrylic coating. The acrylic coated surface provide better adhesion to ink, thereby superior printability

### Key Features:

- i. Good clarity with excellent machine ability
- ii. Good printability
- iii. Enhanced adhesion to, Metals, Inks, Adhesives, and coatings

### Application:

- i. Flexible Packaging Printing, Coating, Lamination
- ii. Frozen Food Packaging
- iii. Printing on Chemical Coated Side

Property		Unit	Test Method	Typical Value
Thickness		Micron	Internal	8,10,12,15,19,23,36
Yield		m <sup>2</sup> /kg	Internal	59.5
Tensile Strength	MD	Kg/cm <sup>2</sup>	ASTM D 882	2000
	TD			2000
Elongation	MD	%	ASTM D 882	90
	TD			90
F-5 Value	MD	Kg/cm <sup>2</sup>	ASTM D 1204	950
	TD			950
Heat Shrinkage 150°C 30 min	MD	%	ASTM D 1204	2.0
	TD			0.4
Haze (Max)		%	ASTM D 1003	3.5
Transmittance (Min)		%	ASTM 1003	85
Co-Efficient of Friction	Static	-	ASTM D 1894	0.55
	Dynamic	-		0.50
Wetting Tension	Corona Treated	Dynes/cm	ASTM D 2578	52+
	Copolymer Coated			42

MD= MACHINE DIRECTION \*TD= TRANSVERSE DIRECTION

**\*The data above only represents 12 Micron, specific data for other microns will be provided on request.\***

### STORAGE & HANDLING

T-PET does not require special storage conditions. It is recommended to storage below 30°C in order to avoid any deterioration of the film surface properties. It is advisable to use the material on FIFO basis. The film should be kept at operating environment for 24 hours before processing. T-PET is best suitable for use up to 3 months from date of dispatch.

### FOOD CONTACT

T-PET complies with EC and FDA regulations. Specific document and MSDS are available on request.

### DISCLAIMER

It is the responsibility of our customer to determine that their use of our product(s) is safe, lawful, and technically suitable in their intended applications. The Values given in the technical data sheet represent typical values based on the best of our knowledge as on date when the data was compiled. It is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability I compatibility in all respects. TPPL gives no warranty or accept liability for any loss and fitness of the product for any specific purpose. TPPL serves the right to change the technical data sheet at any time for enhancing the quality of the products without prior information.

**\*\*TDS issued on 08<sup>th</sup> July 2025 . All Previous versions for this grade are invalid.**