



**TAPADIA
POLYESTERS**

TAPADIA POLYESTERS PVT LTD


D4, Butibori MIDC, Butibori - 441122 Maharashtra, India
Mobile: +91 9823652225
salestapadia@gmail.com | www.tapadiapolyesters.com

PRODUCT DATA SHEET

T-PET

HFM

Film Structure

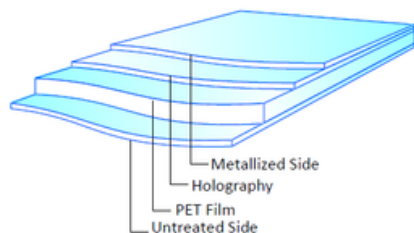

Product Description:

HFM Embossed grade is a Biaxially Oriented Vacuum Metallized Polyester Film with enhanced aesthetics and high gloss properties.

Key Features:

- Good clarity with excellent machine ability & handling properties
- Good mechanical, surface & thermal properties.

Application:

- Flexible Packaging Printing, Coating, Lamination
- Flexible Air Ducts & Air Conductors

Property		Unit	Test Method	Typical Value
Thickness		Micron	Internal	13
Yield		m ² /Kg	Internal	54.95
Tensile Strength	MD	Kg/cm ²	ASTM D 882	1900
	TD			2000
Elongation	MD	%	ASTM D 882	105
	TD			85
Heat Shrinkage 150°C 30 min (Pre Holography Film)	MD	%	ASTM D 1204	2.0
	TD			0.4
Co-Efficient of Friction (Pre Holography Film)	Static	-	ASTM D 1894	0.56
	Dynamic	-		0.52
Optical Density (±5%)		-----	Optel Make Instrument	2.0
Metal Bond Strength (Min)		Gm/25 mm	AMICAL TP 105-92	250

MD= MACHINE DIRECTION *TD= TRANSVERSE DIRECTION

STORAGE & HANDLING

T-PET does not require special storage conditions. It is recommended to storage below 30°C in order to avoid any deterioration of the film surface properties. It is advisable to use the material on FIFO basis. The film should be kept at operating environment for 24 hours before processing. T-PET is best suitable for use up to 3 months from date of dispatch.

FOOD CONTACT

T-PET complies with EC and FDA regulations. Specific document and MSDS are available on request.

DISCLAIMER

It is the responsibility of our customer to determine that their use of our product(s) is safe, lawful, and technically suitable in their intended applications. The Values given in the technical data sheet represent typical values based on the best of our knowledge as on date when the data was compiled. It is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability I compatibility in all respects. TPPL gives no warranty or accept liability for any loss and fitness of the product for any specific purpose. TPPL serves the right to change the technical data sheet at any time for enhancing the quality of the products without prior information.

****TDS issued on 08th July 2025 . All Previous versions for this grade are invalid.**